


SPECIFICATION SHEET

2.5" BORE HYDRAULIC CYLINDERS | WELDED CLEVIS | 3000 PSI RATED

Description:



- Hard chrome rod plating
- 100% tested for quality assurance
- Thread-in gland design for serviceability
- SAE O-ring ports for reliable connection
- Top port or side port design
- Painted color black

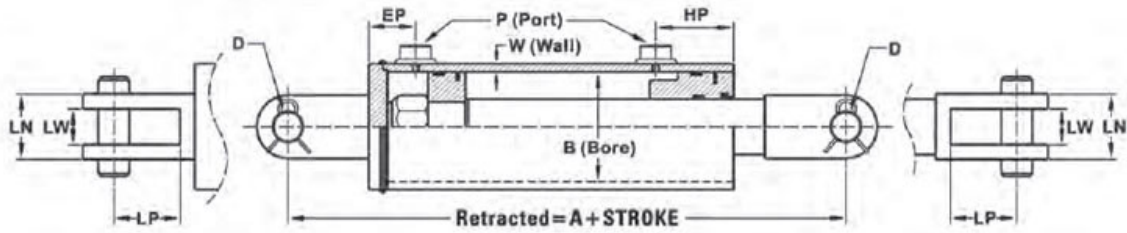

Dimensional Data (Unit: Inch)

PISTON END WIDTH & PORT TYPE

Bore (In)	Ports	Piston End Width		Pin Dia (In)	Distance Between Ears (In)
		LP - Base End (In)	LP - Rod End (In)		
2.5"	SAE 8	2.13"	2.13"	1.00"	1.13"

2.5" BORE SIZE, WELDED CLEVIS CYLINDER

SKU	Bore x Stroke	Retract (In)	Rod		Column Load Ratings (Lbs)	Weight (Lbs)
			Diameter (In)	Load Ratings (Lbs)		
ICW-2504	2.5" x 4"	14.25"	1.25"	14,720	19	
ICW-2506	2.5" x 6"	16.25"	1.25"	14,720	21	
ICW-2508	2.5" x 8"	18.25"	1.25"	14,720	23	
ICW-2510	2.5" x 10"	20.25"	1.25"	14,720	24	
ICW-2512	2.5" x 12"	22.25"	1.25"	14,720	26	
ICW-2514	2.5" x 14"	24.25"	1.25"	14,720	28	
ICW-2516	2.5" x 16"	26.25"	1.25"	14,720	30	
ICW-2518	2.5" x 18"	28.25"	1.25"	14,720	32	
ICW-2520	2.5" x 20"	30.25"	1.25"	14,720	34	
ICW-2524	2.5" x 24"	34.25"	1.25"	14,000	38	
ICW-2530	2.5" x 30"	40.25"	1.25"	9,600	44	
ICW-2536	2.5" x 36"	46.25"	1.25"	7,000	49	